

Positive Voltage Regulator

- Features**

- Output Current Up To 1000mA
- Highly Accurate $\pm 2\%$
- Low Power Consumption 4mA (TYP.)


- General Description**

The FS1117 series of adjustable and fixed voltage regulators are designed to provide 1A output current and to operate down to 1V input-to-output differential. The dropout voltage of the device is guaranteed maximum 1.3V at maximum output current, decreasing at lower load currents.


On-chip trimming adjusts the reference voltage to 1%. Current limit is also trimmed, minimizing the stress under overload conditions on both the regulator and power source circuitry.

The FS1117 devices are pin compatible with other three-terminal SCSI regulators and are offered in the low profile surface mount

- Package Information**



SOT223

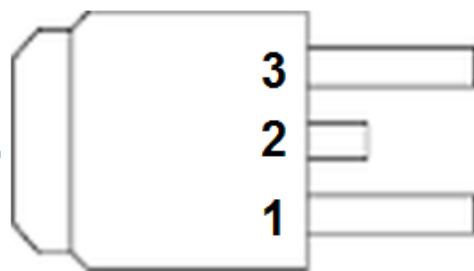


TO252

- Pin Configurations**

PIN	SOT223	SOT223-ADJ	TO252
1	GND	ADJ	GND
2	V _{OUT}	V _{OUT}	V _{OUT}
3	V _{IN}	V _{IN}	V _{IN}

- Functional Block Diagram**

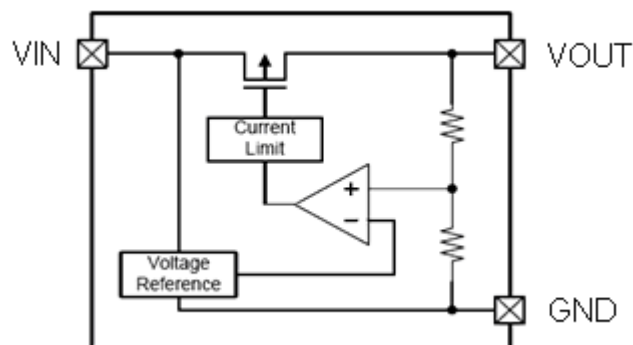

FS1117

● Absolute Maximum Ratings

Parameter	Symbol	Limit	Unit
Input Voltage	Vin	-0.3 to 24	V
Output Current	Iout	1050	mA
Output Voltage	Vout	Vss-0.3 to VIN +0.3	V
Power Dissipation (Tamb = 25°C)	SOT223	1.4	W
Operating Temperature	Topr	40 to +125	°C
Storage Temperature	Tstg	65 to +150	°C

● Electrical Characteristics

Vin=Vout+3V, Ta=25°C, Cin=10uF,CL=22uF, unless otherwise sepcified.


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output Voltage	VOUT(E)	IOUT = 40mA VIN=VOUT (T)+1V	0.98 × VOUT (T)	VOUT (T)	1.02 × VOUT (T)	V
Maximum Output Current	IOUT max	VIN = VOUT+3V		1000	--	mA
Load Regulation	Δ IOUT	VIN = VOUT+1V 1mA ≤ IOUT ≤ 150mA	--	--	0.4	%
Supply Current	ISS	VIN = VOUT + 1V	--	4	6	mA
Line Regulation	Δ VOUT/ (Δ VIN·VOUT)	IOUT = 40mA VOUT + 1V ≤ VIN ≤ 6V	--	0.05	0.2	%
Input Voltage	VIN	--	--	--	24	V
Output Voltage Temperature Characteristics	Δ VOUT/ (Δ VIN·VOUT)	IOUT = 40mA -40°C ≤ Ta ≤ 85°C	--	± 100	--	ppm /°C

Note:

Vout (T) = Specified output Voltage.





FS1117

- Typical Performance Characteristics (T_J = 25 Noted)

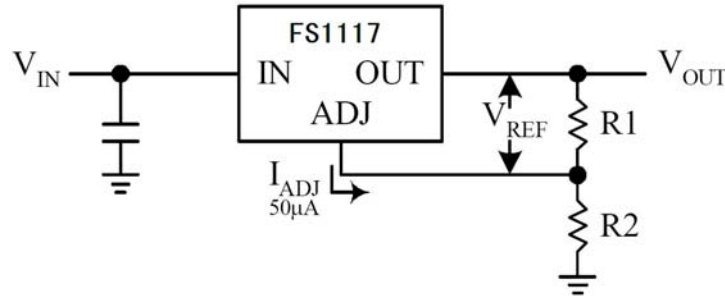


$$V_{OUT} = V_{REF} (1 + R2/R1) + I_{ADJ}R2$$

- Typical Performance Characteristics

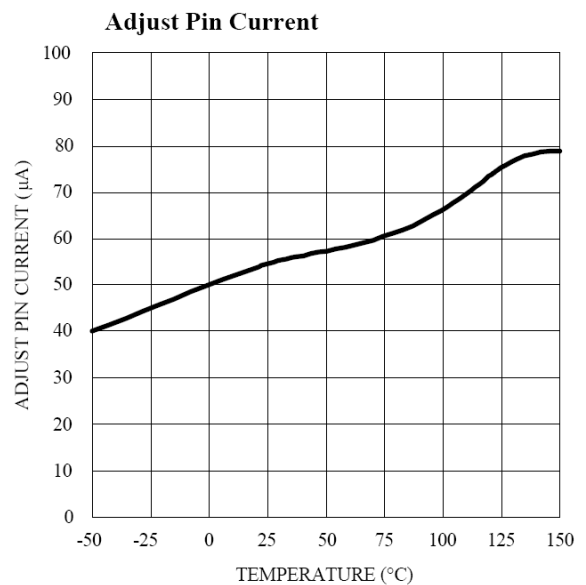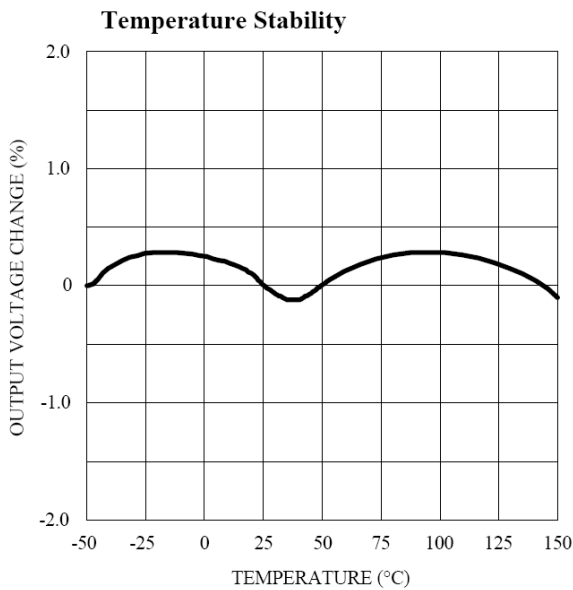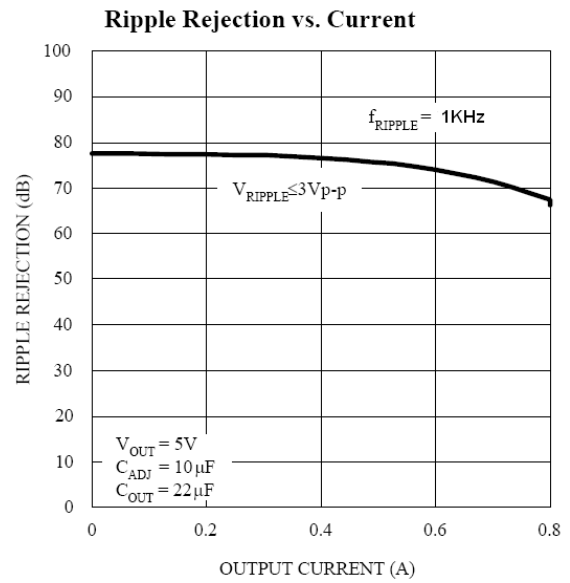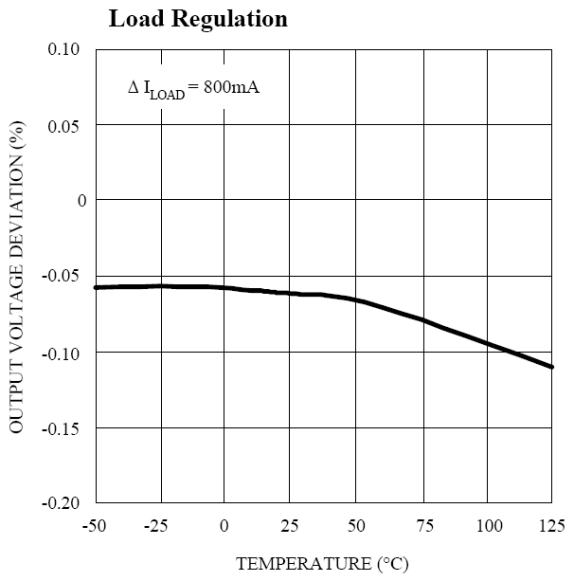

FS1117

- Package Information

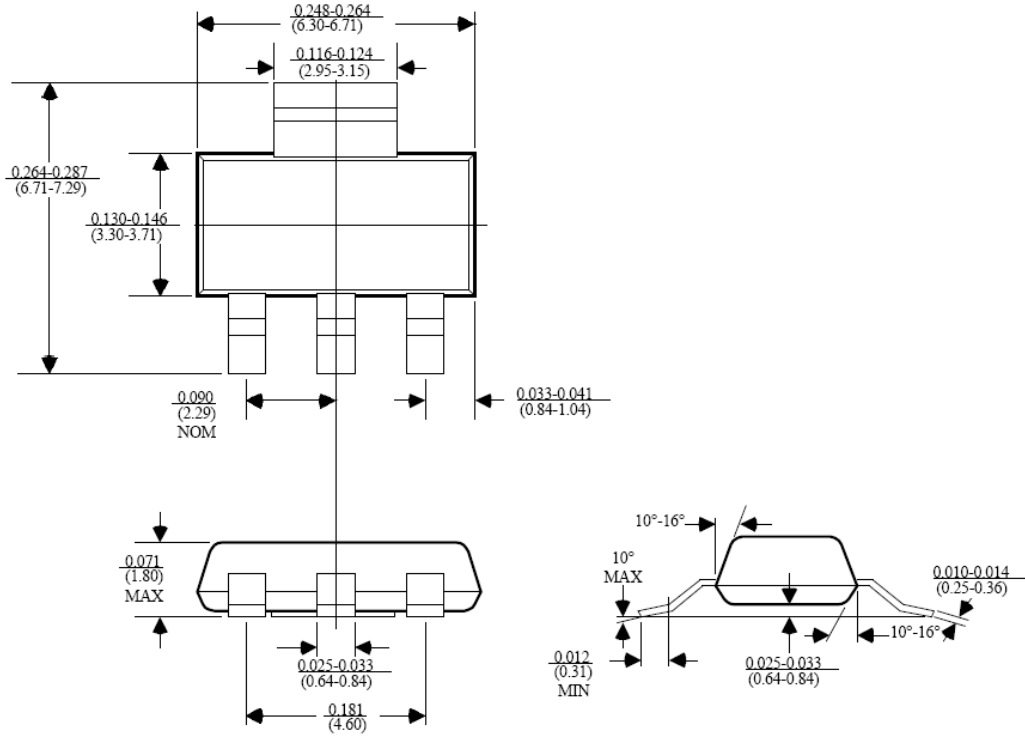

IMPORTANT NOTICE

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Team-tech assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. FORSEMI reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.